


## IVO Voice alarm system

### 2LG - 2-line speaker card

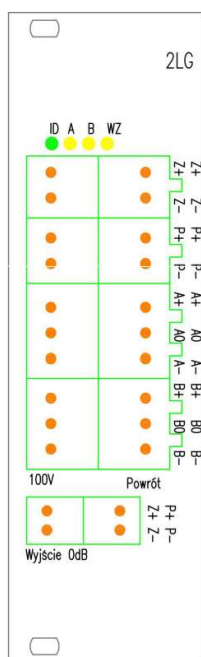

The 100V loudspeaker lines are connected directly to the 2LG modules of the control panel. One card supports two loudspeaker lines and volume controls with bypass. The 2LG card allows you to power one, two or more speaker lines or two lines in an A / B configuration from the same power amplifier. Mixed work is also possible. The loudspeaker line monitoring is carried out using the impedance method or by means of a pilot signal. The 2LG module also supports the loudspeaker loop.

#### Selected technical data

The number of supported loudspeaker lines	2
Audio signal correction	Parametrical
Delay on loudspeaker lines	+
Flash memory of an emergency (emergency) message	30s
Volume bypass function	+
The method of monitoring loudspeaker lines	Impedance or by pilot
Permissible one line load	500 VA
Speaker line voltage (RMS)	0..100 V
Possibility to detect damage to a single loudspeaker	+
Power	20..60 V DC
Dimensions	3U, 8HP