


## DEL 165/6 – A/B PP

The ceiling speakers DEL 165/6 - AB PP are equipped with two independently operating loudspeaker lines transformers / loudspeakers, which allows you to power two separate wires. Thanks to the A / B series loudspeakers, both A and B operate in independent assembly points. In case of failure of one of the lines, the other can work, thanks to which the level of security is maintained. Connection module with 3-contact ceramic cube with thermal fuse Includes fire protection cover with steel sling.

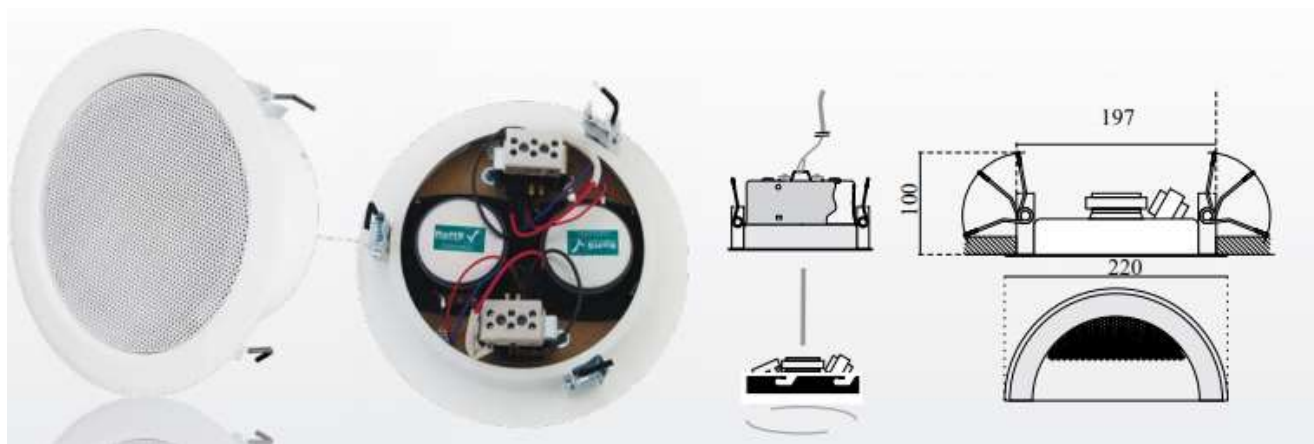

Technical data

Symbol	DEL 165/6 – A/B PP
Nominal power	6W
Speaker type	2 X 77 mm wideband
Frequency range (-10dB)	375 – 16 500 Hz
SPL 1W/1m	88,5 dB
SPL Pmax/1m	96,4 dB
Emission angle 1.000 Hz (-10 dB)	H: 180°/175°/160°/130°, V: 180°/165°/80°/40°
Transformer type	100V, 2 x 6/3/1,5/0,75 W
Dimensions	220 x 110 mm
Mounting hole	197 mm – 207 mm
Weight	1,9 kg
Material	Steel, powder coated
Connector	3-pin ceramic cube
Colour	RAL-9010 White/whole RAL palette
VPE	12

