

## DL 20-130/T-EN54



- quick Mounting
- excellent sound



EN 54-24:2008  
Ref. Nr.: 010-14  
ID-Code: SAA-LS01  
1438-CPR-0233

ic audio GmbH, Boehringerstraße 14a,  
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The 20W powered speaker is equipped with a 130mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The powder coated metal similar in RAL 9010 guarantees long-term stability. For additional reliability, a 2 pin-ceramic block, a thermal fuse is provided and the speaker chassis is impregnated against wetness..

The speaker is also secured with protection class IP 21C against the security risks of environmental influences. Quick and easy mounting with spring clamps and short tension distance. The connecting cables can be supplied by rubber grommets in the firedome.


Special paint of the speaker in 4-digit RAL- or NCS- colour available at extra cost.

The firedome is included in the delivery.


This speaker is suitable for a ceiling strength of about 2 – 45 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match requirements accurately.

## Polar Diagrams

Copyright by Fono-Audio GmbH & Co KG Licensed to AAC

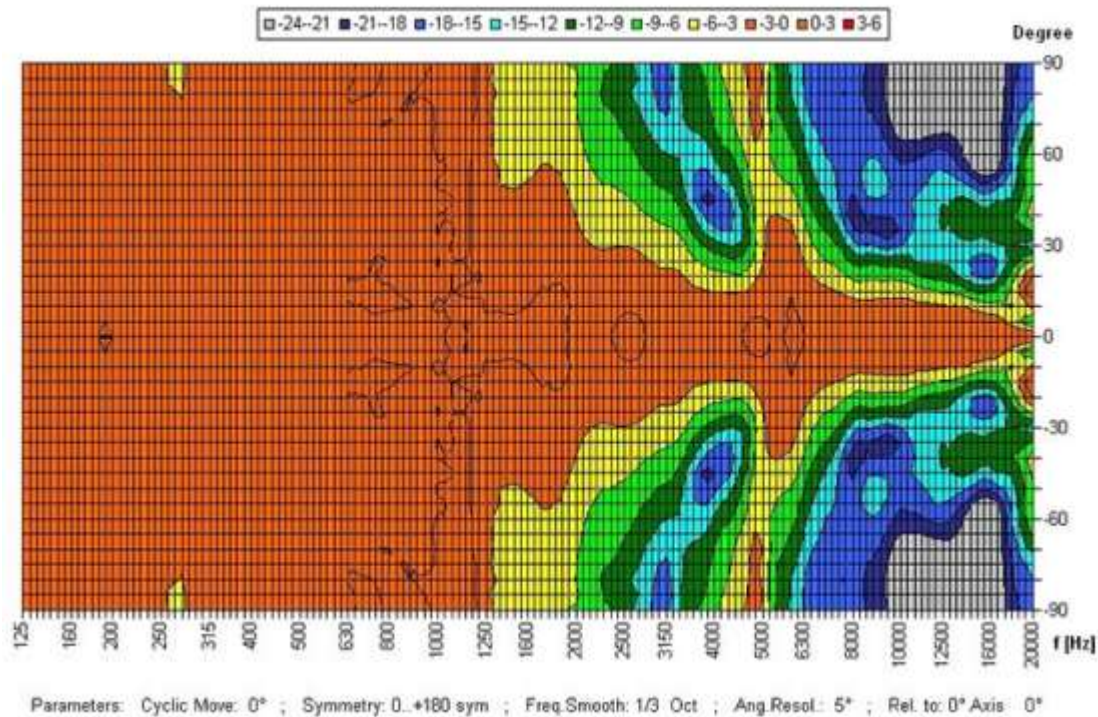


## Frequency Response Diagrams

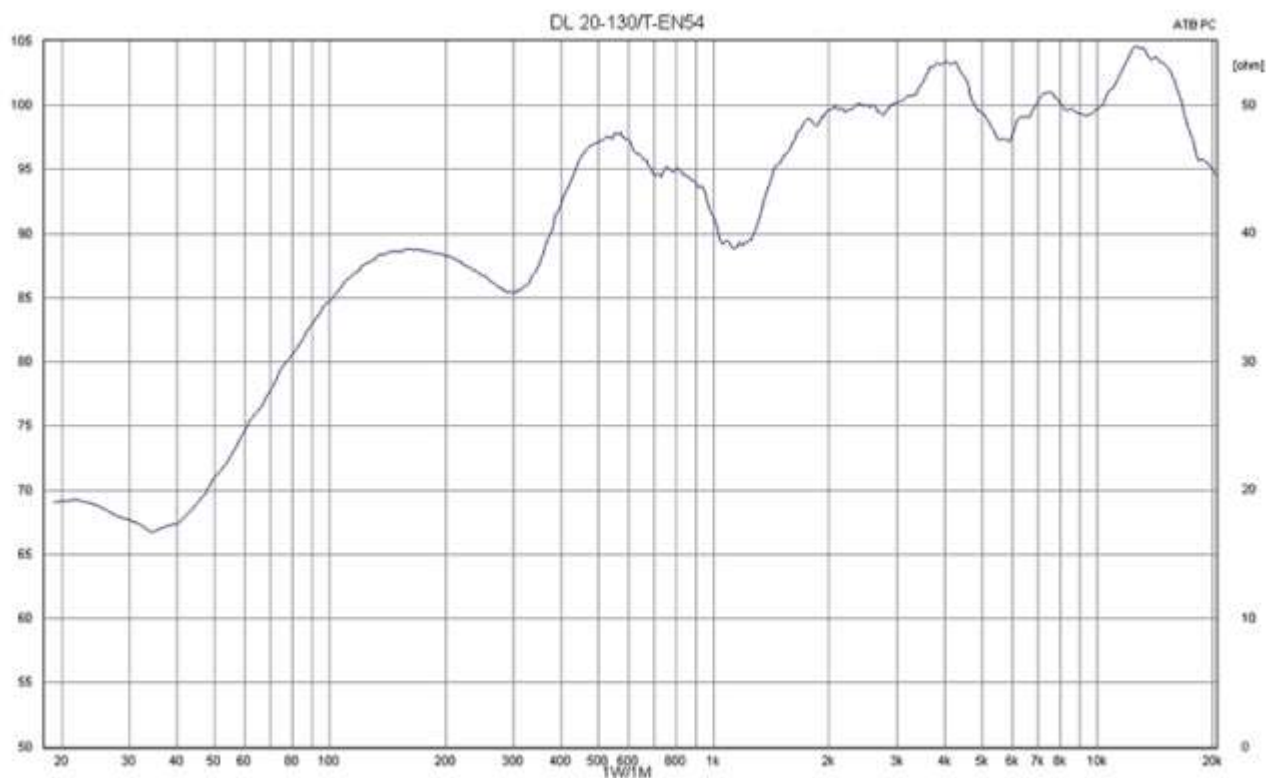



## Technical Diagrams

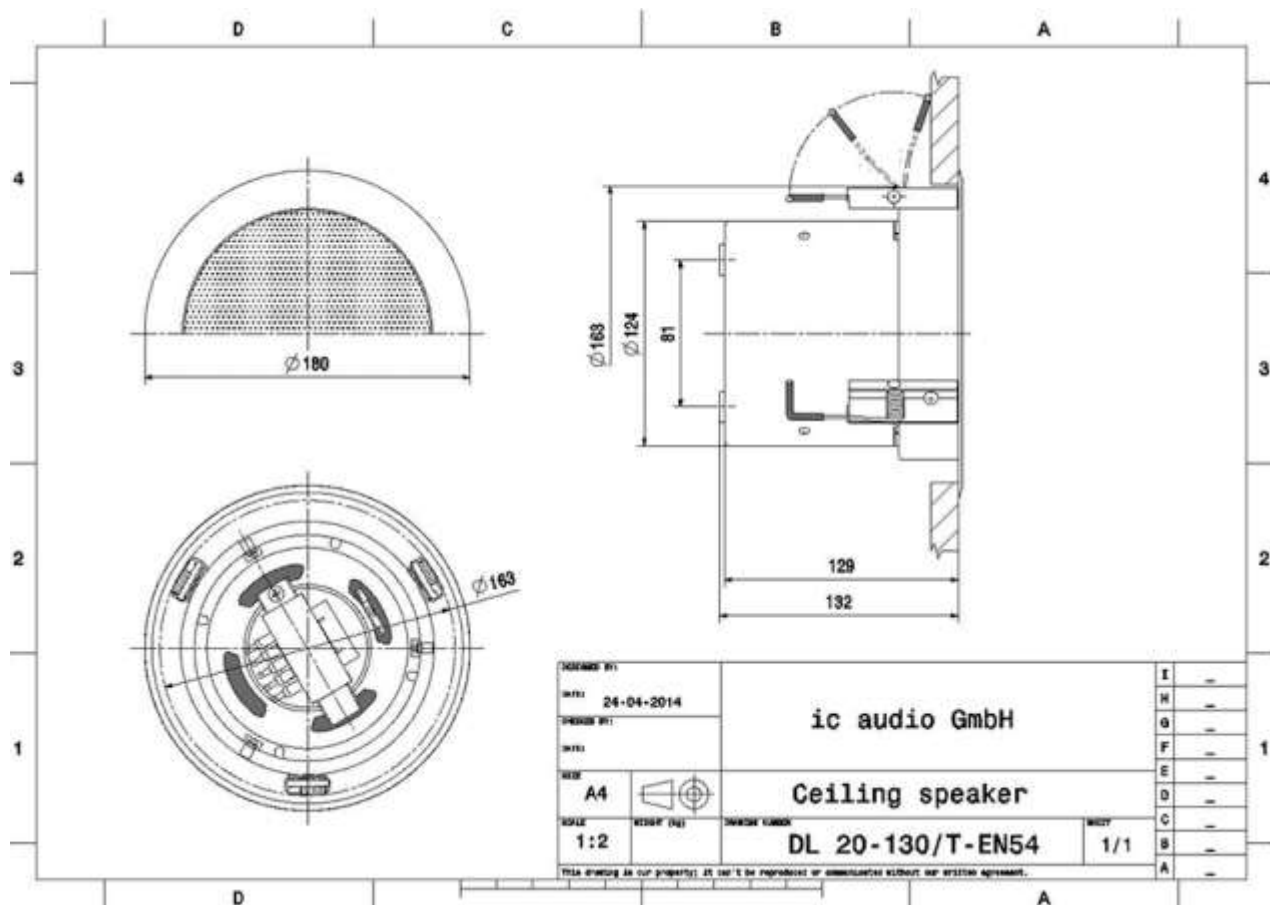

#### Technical Data (Electrical)

Description	DL 20-130/T-EN54
Power	20/15/10/5 W
Impedance (100V)	500/667/1000/2000 ohm
Frequency Range	370 - 16.800 Hz
Frequency Response	96 - 24.000 Hz
SPL 1W/1m, peak	104,2 dB
SPL, 1W/4m, peak	92,5 dB
SPL Pmax/4m, peak	105,2 dB
Sensitivity EN54-24, 1W/4m	80,0 dB
Sensitivity IEC 268-5, 1W/1m	92,0 dB
Dispersion -6dB, 500 Hz	180°
Dispersion -6dB, 1KHz	175°
Dispersion -6dB, 2KHz	130°
Dispersion -6dB, 4KHz	65°

#### Technical Data (Mechanical)

Dimensions	180x132 mm
IP Rating	IP21
Weight (net)	1,71 kg
Ceiling Cut-out	169 mm
Temperature range	-20 / +80 °C
Mounting	Quick fit mounting
Connector	2-pin ceramic block
Maximum cable cross section	8mm <sup>2</sup>
Max. cable cross section loop	2 x 2 mm <sup>2</sup>
Colour	RAL 9010