


## IVO Voice Alarm System

### WSS - alarm and control inputs card

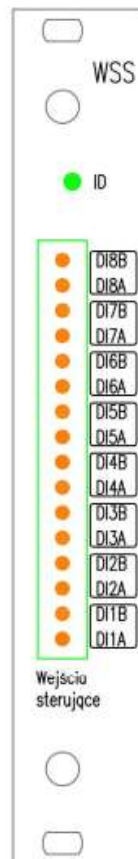

The WSS card is mainly intended for connection to non potential(relay) zone outputs of fire alarm system devices. Activation of the binary inputs of the card enables advanced control of the IVO DSO unit.

#### Selected technical data

|                         |                |
|-------------------------|----------------|
| Number of binary inputs | 16             |
| Input and control type  | NO/NC, voltage |
| The maximum delay time  | 100 ms         |
| Power                   | 20..60 V DC    |
| Dimensions              | 3U, 4HP        |