

50 Watts Ceiling loudspeaker

APPLICATION

- Public Address and Voice Alarm
- Outdoor application
- Background Music

AREA OF USE

- Health • Education • Retail • Hospitality
- Stadiums • Transportation • Theme parks • Military



EN 54 24

- 2way system
- thermal fuse
- magnetic fastening of grille


OVERVIEW

2-Way ceiling speaker with fire dome for voice alarm applications certified EN 54-24, suitable for voice announcements and background music with excellent sound quality in buildings. The 50W powered speaker is equipped with a 165mm 2-way system featuring a high-quality tweeter and a 100V transformer with 4 power adjustments. Low impedance operation is also possible. The sturdy metal housing in RAL 9016 guarantees long-term durability.


Thanks to an innovative magnetic fastening, the finely perforated speaker grille can quickly be removed or replaced by a grille of a different color, even after the installation.

The speaker is impregnated against dampness. Protection class IP 21C secures the speaker against the risks of environmental influences. Fast and easy installation via a screw mounting system.


POLAR DIAGRAMS

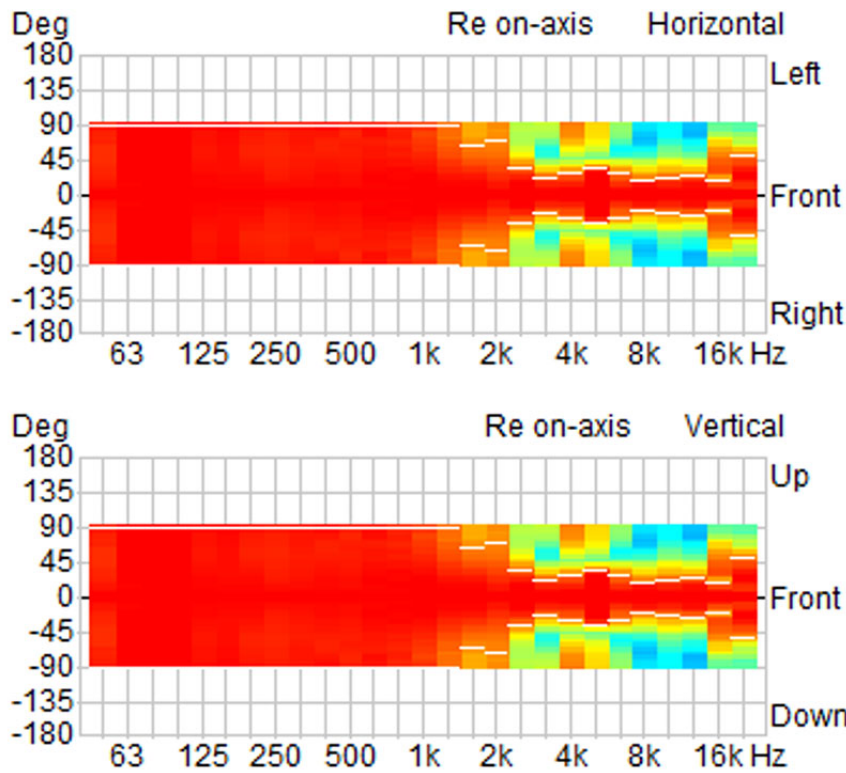

FREQUENCY RESPONSE DIAGRAMS

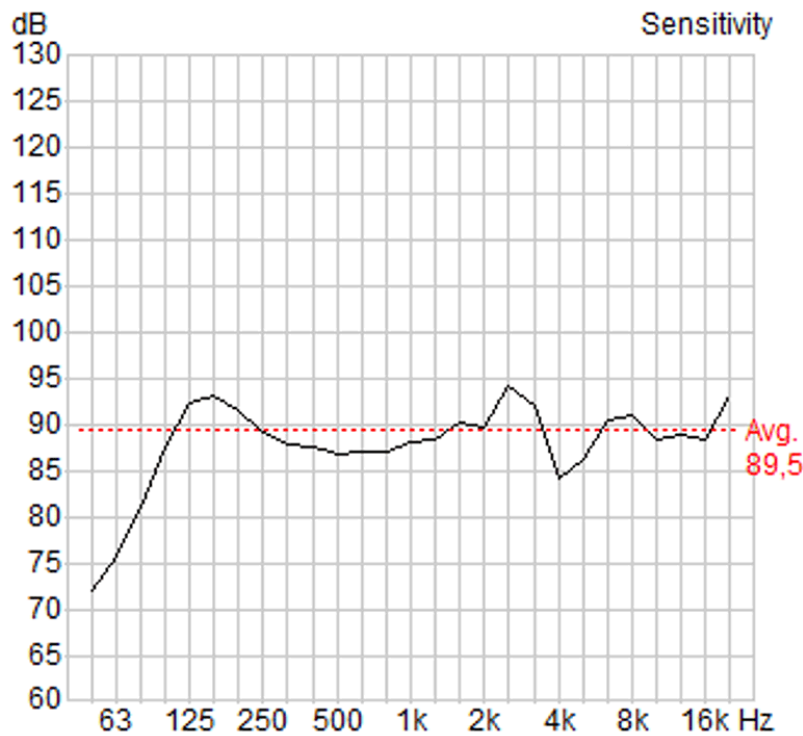

TECHNICAL DIAGRAMS

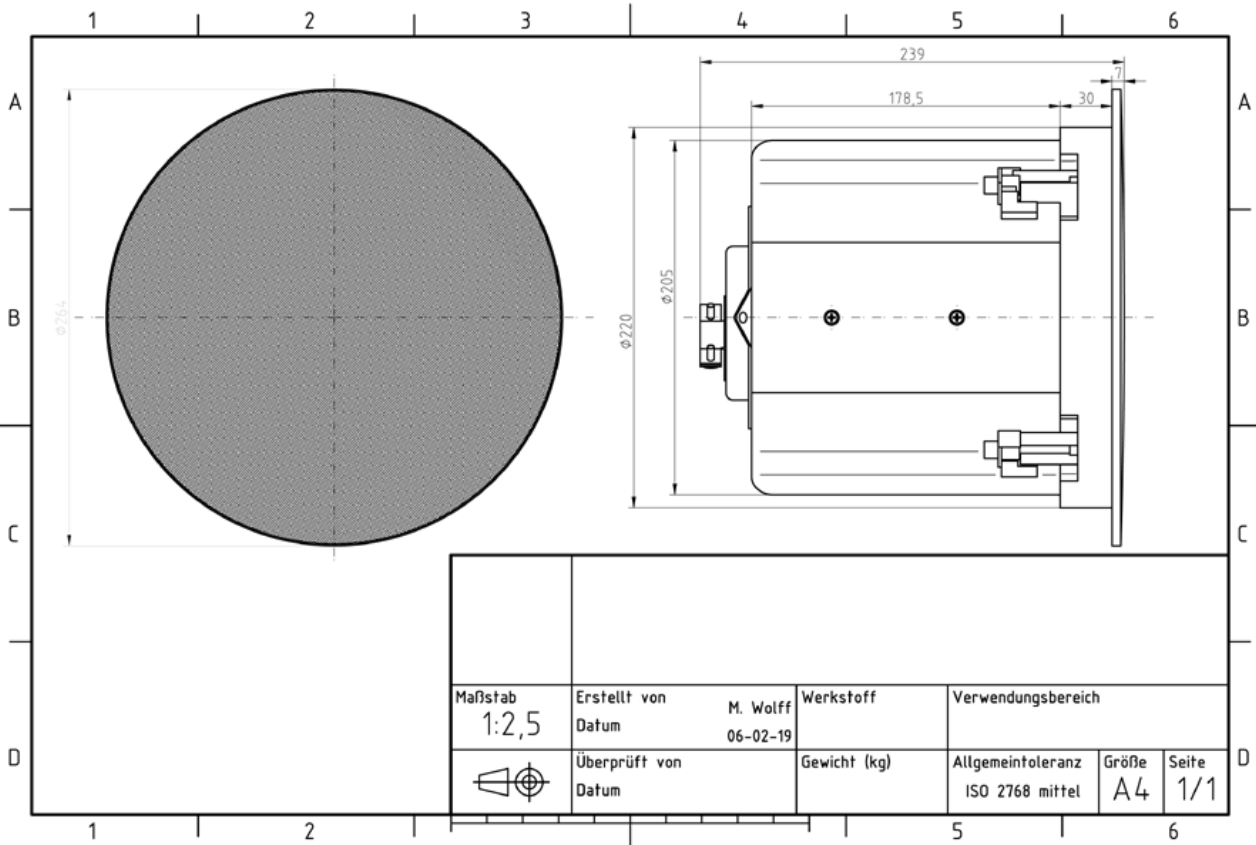

TECHNICAL DATA (ELECTRICAL)

Description	CSFLD-50W-165
Power	50/25/12,5/6,25/ (8) W
Impedance (100V)	200/400/800/1600/ ohm
Frequency Range	65-24.000 Hz
Frequency Response	80-22.200 Hz
Sensitivity , IEC268-5, 1W/1m	89,5 dB
Sensitivity , EN54-24, Pmax./4m	94,3 dB
Sensitivity , rated noise power / 4m	94,3 dB
Sensitivity EN54-24, 1W/4m	77,5 dB
Sensitivity EN54-24, 1W/1m	89,5 dB
Sensitivity 1W/1m @ 1KHz	88 dB
Dispersion -6dB, 500Hz	180°
Dispersion -6dB, 1KHz	180°
Dispersion -6dB, 2KHz	140°
Dispersion -6dB, 4KHz	56°

TECHNICAL DATA (MECHANICAL)

Dimensions	264 x 240 mm
IP Rating	IP21
Weight (net)	3,75 kg
Ceiling Cut-out	238 mm
Temperature range	-10 / +55 °C
Mounting	Screw system
Connector	4-pin screw terminal
Maximum cable cross section	4,9mm ²
Max. cable cross section loop	2x4,9mm ²
Colour	RAL 9016

All rights reserved.

The information contained in this document is believed to be accurate; however, no representation or warranty is given, and pAudio Technologies assumes no liability regarding its accuracy or completeness.